

ATEX ZONE 0 FLOOD BANKS




WITHOUT COMPROMISE

XT-602, XT-604 & XT-606 ZONES **0** **1** **2** **20** **21** **22**

PRODUCT INFORMATION

The ATEX Zone 0 Flood Bank exploits the excellent performance and reliability of the Wolflite XT Rechargeable Zone 0 Handlamps to deliver collectively a flood of outstanding illumination, of up to 2,100 lumens, to a Zone 0 hazardous task area.

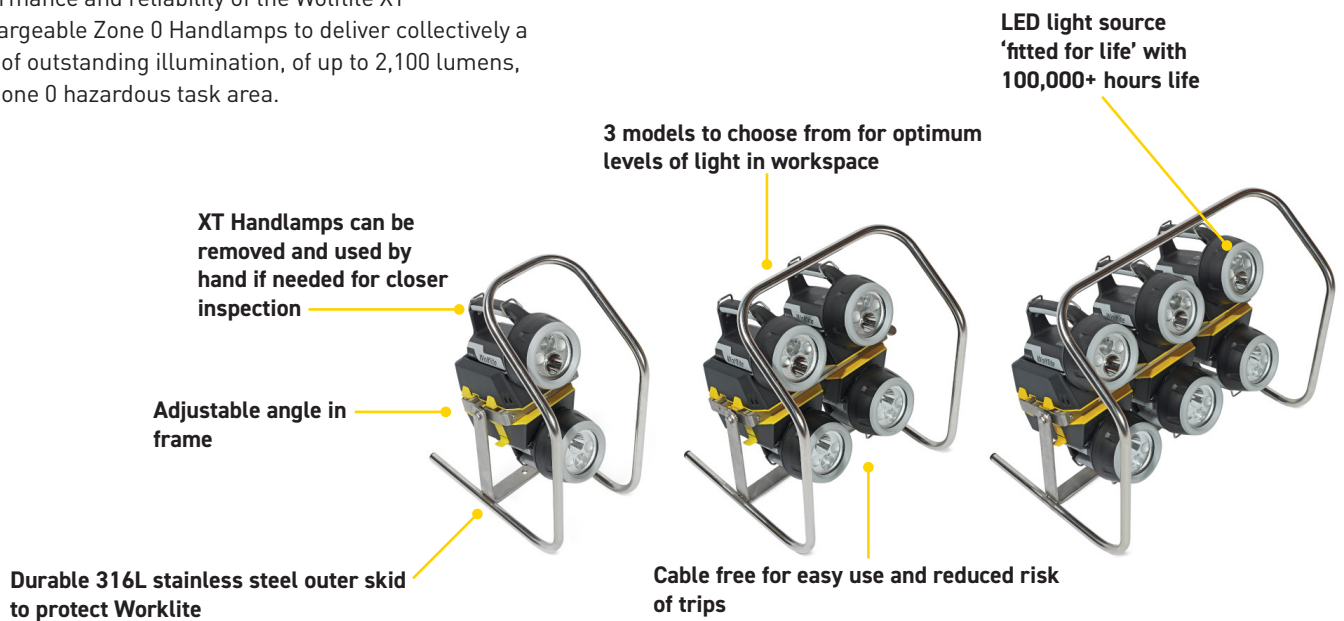

KEY INFORMATION

CERTIFICATION

- ATEX and IECEx certified for use in Zone 0, 1 and 2 hazardous areas
- IP Rating: 67, the Floodbank is dust tight and protected against powerful water jets and immersion up to 1 metre (30 minutes max)

AMBIENT APPROVED

- -20°C to +40°C

LIGHT OUTPUT

- Ultra bright high power LED light up to 2,100 lumens
- Flood and spot switchable beam options, ideal for use both in the Floodbank and handheld
- LED light source 'fitted for life' with 100,000+ hours life

LIGHT DURATION

- Up to 7.5 hours (full power) / 15 hours (powersave) duration

FEATURES

- Incorporates Wolflite XT Rechargeable Zone 0 Handlamps (XT-75) with configuration of 2, 4 or 6 handlamps per bank
- Mountable on tripod (available separately) or positioned at ground level
- 2 power levels (high/low) allowing user to accommodate appropriate light based on the work task at hand
- Built in state of charge indication for each lamp
- Tilt adjustment within frame to direct light accordingly
- Robust and durable construction

TECHNICAL INFORMATION

See [Wolfrite XT Rechargeable LED Handlamp XT-75](#) for full technical details.

ATEX ZONE 0 FLOOD BANKS			
PRODUCT REFERENCE	XT-602	XT-604	XT-606
PRODUCT DESCRIPTION	ATEX Zone 0 Flood Bank		
HANDLAMP CONFIGURATION	x 2	x 4	x 6
STAND MATERIAL	Stainless Steel		
HANDLAMP HOLDER MATERIAL	Impact Resistant Thermoplastic, Electrostatic Non-Hazardous 'Snap-in/Snatch-out' Function		
DIMENSIONS	340 mm L x 197 mm W x 451 mm H	340 mm L x 352 mm W x 451 mm H	340 mm L x 507 mm W x 451 mm H
WEIGHT - STAND/HOLDERS ONLY	2.6 Kg	3.6 Kg	4.5 Kg
WEIGHT - WITH HANDLAMPS	5 Kg	8.4 Kg	11.7Kg
TOTAL LIGHT OUTPUT	700 lms	1400 lms	2100 lms
HANDLAMPS & CHARGERS	Includes Stand with Handlamp Holders only attached, Wolfrite XT Rechargeable Zone 0 Handlamps (XT-75) and a separate Quick Charger with Mains Adaptor 100-254V AC (XT-200H - for use in safe area only) for each handlamp.		

All information has been gathered under laboratory conditions, the user must regard the values given as approximate. Changes may be made to the above specification without notification, details are available on request.

